TECHNICAL DATA SHEET

Cosmedico®
FIRST CHOICE IN TANNING

COSMOLUX VHR 10K100 R 122 200W 2.0M

NAFTA Code: FR79 T12 180W VHO PH
Equivalency Code: 200-R-122/5,9

Item Code: 30620

Electrical data (nominal values)	
Lamp power	200 W
Supply voltage	230 V
Ballast	200 W / 230 V

Physical data	
UVA flux (315-400 nm) ±10%	59 W
UVA irradiance (315-400 nm) ±10%	39 W/m²
UVB irradiance (280-315 nm) ±10%	680 mW/m²
UVB/UVA ratio	1,7 %
Recommended useful life	1000 hrs

Lamp specifications (acc. IEC/EN 61228)

a) Dimensions (in mm)	
Length (nominal)	2.000,0
Length without pins (max)	2.001,3
Length base – pin (min)	2.006,0
Length base – pin (max)	2.008,4
Length with pins (max)	2.015,5
Diameter (nominal/max)	38,0 / 40,5
Base	G13 standard

b) Reflector	225°

c) Specified ballast	Cosmopower S 180W/230V

d) Electrical data (rated values)	
Lamp power	200 W
Lamp current	1.955 mA
Lamp voltage	120 V

e) Effective irradiance (rated values)	
UV-Erythema (250-400 nm) ±15%	122 mW/m²
nmsc (250-320 mm) ±15%	165 mW/m²
nmsc (320-400 mm) ±15%	28 mW/m²

f) Equivalency code	200-R-122/5,9

Examples of exposure times

UVA irradiance	First session tanning time	Maximum tanning time in Min. by skin type		
in W/m²	*in Min.*	*2*	*3*	*4*
460	1,1	2,6	3,7	4,8
510	1,0	2,4	3,3	4,3
560	0,9	2,2	3,0	3,9
610	0,8	2,0	2,8	3,6
660	0,7	1,8	2,6	3,3

(depending on the actual UVA irradiance of the sunbed)

Construction elements	
Mount	LM
Glass type	open
Light Colour	see picture

Equipment requirements	
Starter	200 W / 230 V

Additional specifications

This lamp is intended for sun-tanning purposes only and shall not be used in any other application
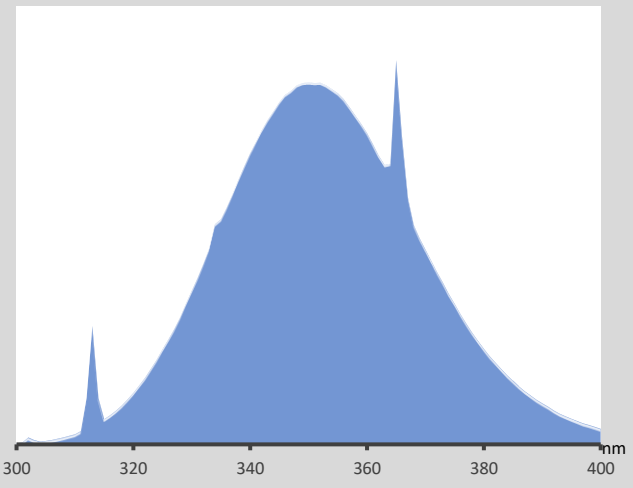
Relative spectral distribution